


# Audible Signals EXPLOSION PROOF



## SOUNDERS

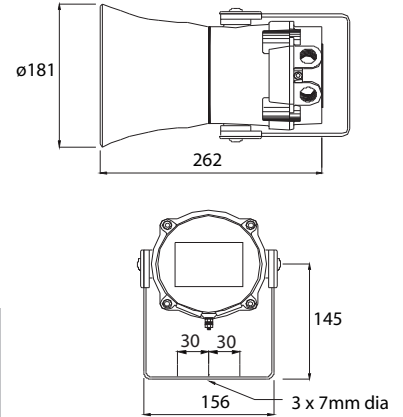

## Explosion Proof Audible Sounders >

### Product overview

This high decibel 32 tone selectable electronic sounder gives the user a choice of the 1st stage alarm tone with stage 2 and 3 fixed at manufacture. The tones include those covering the PFEER/UKOOA requirements.

### Features

Rated Category 1 use  
(formerly Zone 1 & 2)

ATEX approved

 II 2 G EExd IIC T4

117dB @ 1m

2 x 20mm cable entries

4mm terminals for ease of connection

### Material

Marine Grade LM6 Aluminium

Code No:	Voltage:	Current:
EAE100-24	24v Dc ---	250 mA
EAE100-115	115v Ac ~	110 mA
EAE100-230	230v Ac ~	56 mA



**Kg** 3.20 DC 3.40 AC

**dB** 117

 **°C** -50+55

**IP** 67

